

Item No.: WS-440

Driver unit: Φ 40mm

Frequency response: 20-20,000HZ

Sensitivity: 107db at 1KHZ

Impedance: 32 Ω

Rated power: 100Mw

Cable length: 120Cm

Plug type: 3.5mm



Item No.: WS-1396

Driver unit: Φ 40mm

Frequency response: 20-20,000HZ

Sensitivity: 107db at 1KHZ

Impedance: 32 Ω

Rated power: 100Mw

Cable length: 120Cm

Plug type: 3.5mm



Item No.: WS-903

Driver unit: Φ 40mm

Frequency response: 20-20,000HZ

Sensitivity: 107db at 1KHZ

Impedance: 32 Ω

Rated power: 100Mw

Cable length: 120Cm

Plug type: 3.5mm



Item No.: WS-340

Driver unit: Φ 40mm

Frequency response: 20-20,000HZ

Sensitivity: 107db at 1KHZ

Impedance: 32 Ω

Rated power: 100Mw

Cable length: 120Cm

Plug type: 3.5mm



Item No.: WS-1010

Driver unit: Φ 40mm

Frequency response: 20-20,000HZ


Sensitivity: 107db at 1KHZ

Impedance: 32 Ω

Rated power: 100Mw

Cable length: 120Cm

Plug type: 3.5mm

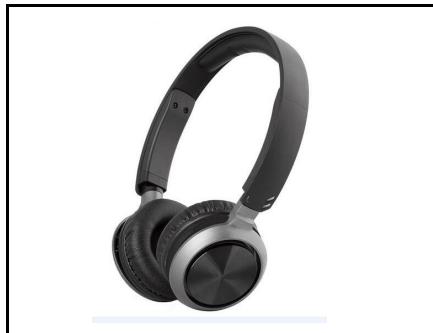

Item No.: WS-056

Driver unit: Φ 40mm

Frequency response: 20-20,000HZ

Sensitivity: 107db at 1KHZ

Impedance: 32 Ω

Rated power: 100Mw

Cable length: 120Cm

Plug type: 3.5mm



Item No.: WS-1201
Driver unit: Φ 40mm
Frequency response: 20-20,000HZ
Sensitivity: 107db at 1KHZ
Impedance: 32 Ω
Rated power: 100Mw
Cable length: 120Cm
Plug type: 3.5mm



Item No.: Ws-1202
Driver unit: Φ 40mm
Frequency response: 20-20,000HZ
Sensitivity: 107db at 1KHZ
Impedance: 32 Ω
Rated power: 100Mw
Cable length: 120Cm
Plug type: 3.5mm



Item No.: Ws-1210
Driver unit: Φ 40mm
Frequency response: 20-20,000HZ
Sensitivity: 107db at 1KHZ
Impedance: 32 Ω
Rated power: 100Mw
Cable length: 120Cm
Plug type: 3.5mm



Item No.: Ws-1208
Driver unit: Φ 40mm
Frequency response: 20-20,000HZ
Sensitivity: 107db at 1KHZ
Impedance: 32 Ω
Rated power: 100Mw
Cable length: 120Cm
Plug type: 3.5mm



Item No.: WS-1200
Driver unit: Φ 40mm
Frequency response: 20-20,000HZ
Sensitivity: 107db at 1KHZ
Impedance: 32 Ω
Rated power: 100Mw
Cable length: 120Cm
Plug type: 3.5mm



Item No.: Ws-1203
Driver unit: Φ 40mm
Frequency response: 20-20,000HZ
Sensitivity: 107db at 1KHZ
Impedance: 32 Ω
Rated power: 100Mw
Cable length: 120Cm
Plug type: 3.5mm



Item No.: Ws-1205
Driver unit: Φ 40mm
Frequency response: 20-20,000HZ
Sensitivity: 107db at 1KHZ
Impedance: 32 Ω
Rated power: 100Mw
Cable length: 120Cm
Plug type: 3.5mm



Item No.: Ws-1209
Driver unit: Φ 40mm
Frequency response: 20-20,000HZ
Sensitivity: 107db at 1KHZ
Impedance: 32 Ω
Rated power: 100Mw
Cable length: 120Cm
Plug type: 3.5mm



Item No.: Ws-1207
Driver unit: Φ 40mm
Frequency response: 20-20,000HZ
Sensitivity: 107db at 1KHZ
Impedance: 32 Ω
Rated power: 100Mw
Cable length: 120Cm
Plug type: 3.5mm




Item No.: Ws-1218
Driver unit: Φ 40mm
Frequency response: 20-20,000HZ
Sensitivity: 107db at 1KHZ
Impedance: 32 Ω
Rated power: 100Mw
Cable length: 120Cm
Plug type: 3.5mm



Item No.: Ws-1204
Driver unit: Φ 40mm
Frequency response: 20-20,000HZ
Sensitivity: 107db at 1KHZ
Impedance: 32 Ω
Rated power: 100Mw
Cable length: 120Cm
Plug type: 3.5mm



Item No.: Ws-1206
Driver unit: Φ 40mm
Frequency response: 20-20,000HZ
Sensitivity: 107db at 1KHZ
Impedance: 32 Ω
Rated power: 100Mw
Cable length: 120Cm
Plug type: 3.5mm

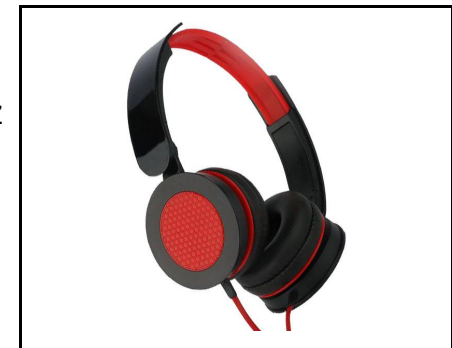

Item No.: Ws-1011

Driver unit: Φ 40mm

Frequency response: 20-20,000HZ

Sensitivity: 107db at 1KHZ

Impedance: 32 Ω

Rated power: 100Mw

Cable length: 120Cm

Plug type: 3.5mm



Item No.: Ws-1016

Driver unit: Φ 40mm

Frequency response: 20-20,000HZ

Sensitivity: 107db at 1KHZ

Impedance: 32 Ω

Rated power: 100Mw

Cable length: 120Cm

Plug type: 3.5mm



Item No.: WS-8528

Driver unit: Φ 40mm

Frequency response: 20-20,000HZ

Sensitivity: 107db at 1KHZ

Impedance: 32 Ω

Rated power: 100Mw

Cable length: 120Cm

Plug type: 3.5mm



Item No.: Ws-1305

Driver unit: Φ 40mm

Frequency response: 20-20,000HZ

Sensitivity: 107db at 1KHZ

Impedance: 32 Ω

Rated power: 100Mw

Cable length: 120Cm

Plug type: 3.5mm



Item No.: Ws-1306

Driver unit: Φ 40mm

Frequency response: 20-20,000HZ

Sensitivity: 107db at 1KHZ

Impedance: 32 Ω

Rated power: 100Mw

Cable length: 120Cm

Plug type: 3.5mm



Item No.: Ws-1309

Driver unit: Φ 40mm

Frequency response: 20-20,000HZ

Sensitivity: 107db at 1KHZ

Impedance: 32 Ω

Rated power: 100Mw

Cable length: 120Cm

Plug type: 3.5mm



Item No.: Ws-1330

Driver unit: Φ 40mm

Frequency response: 20-20,000HZ

Sensitivity: 107db at 1KHZ

Impedance: 32 Ω

Rated power: 100Mw

Cable length: 120Cm

Plug type: 3.5mm



Item No.: Ws-1326

Driver unit: Φ 40mm

Frequency response: 20-20,000HZ

Sensitivity: 107db at 1KHZ

Impedance: 32 Ω

Rated power: 100Mw

Cable length: 120Cm

Plug type: 3.5mm



Item No.: Ws-1308

Driver unit: Φ 40mm

Frequency response: 20-20,000HZ

Sensitivity: 107db at 1KHZ

Impedance: 32 Ω

Rated power: 100Mw

Cable length: 120Cm

Plug type: 3.5mm



Item No.: Ws-1358

Driver unit: Φ 40mm

Frequency response: 20-20,000HZ

Sensitivity: 107db at 1KHZ

Impedance: 32 Ω

Rated power: 100Mw

Cable length: 120Cm

Plug type: 3.5mm

